

YPB#: PB_XPR_H20B_VF150LA_2017-08-03_ALM

Test Date 8/3/17



Boat Manufactured By:


Xpress Boats • 199 Extrusion Place • Hot Springs, AR 71901
501-262-5300 • www.xpressboats.com

PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	4.9	0.8	6.13
1500	6.9	1.4	4.93
2000	9.8	2.2	4.46
2500	19.8	2.9	6.83
3000	27.0	3.5	7.71
3500	31.9	4.6	6.94
4000	37.4	6.2	6.02
4500	42.3	7.7	5.49
5000	46.5	9.7	4.79
5500	51.0	12.4	4.11
6100	55.0	15.0	3.67

0~30 MPH

4.73

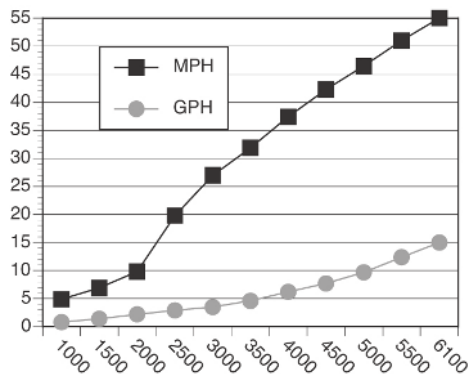

Test performed and verified by Yamaha Applications Engineers.



Xpress® H20B

Length	20' 3"
Beam	95"
Dry Weight (Boat Mfr. Pub)	1,436 lbs
Maximum HP	150
Fuel Capacity	30 gal
Weight as Tested	2,612 lbs

VF150LA V MAX SHO®

Horsepower	150 HP
Induction	EFI
Displacement	2.8 L
Weight	480 lbs
Gear Ratio	2.00:1

ENGINE MOUNTING HEIGHT

Mounting Hole Position	#3 on 6" Manual Jack Plate
------------------------	----------------------------

PROPELLERS

Series	Pro
Diameter/Pitch	14-1/2 x 21
Yamaha Part #	66K-45976-B0-00
Propeller Material	Polished Stainless Steel

TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	87 / 80° F
Elevation (in feet above sea level)	297'
Wind Velocity	0-5 mph

Comments: Test weight includes 30 gallons of fuel, 1 battery, bow-mounted trolling motor, onboard battery charger, 6" manual jack plate, safety and test gear.

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

For more information

Yamaha Motor Corporation, U.S.A.
OEM Division, Marine Group

1270 Chastain Road NW

Kennesaw, GA 30144 • (800) 88-YAMAHA

For other Performance Bulletins, visit www.yamaha-motor.com.